


SONICWALL INSTRUCTIONS

Name	Address Detail	Type	Zone
Smartchoice VOIP 1	3.18.7.201	Host	WAN
Smartchoice VOIP 2	18.224.32.181	Host	WAN
Smartchoice VOIP 3	3.139.164.173	Host	WAN
Smartchoice VOIP 4	3.128.136.244	Host	WAN
Smartchoice VOIP 5	13.58.25.213	Host	WAN
Smartchoice VOIP 6	13.58.83.9	Host	WAN
Smartchoice VOIP 7	18.218.210.151	Host	WAN
Smartchoice VOIP 9	18.220.153.203	Host	WAN
Smartchoice VOIP 10	3.136.132.236	Host	WAN

Create Firewall access rules under Firewall, then Access Rules.

Zone	>	Zone	Priority	Source	Destination	Service	Action	Users	Flow Report	Geo-IP Filter	Botnet Filter	Packet Monitor	Comment	Enable
LAN	>	WAN	1	Any	Smartchoice VOIP1	Any	Allow	All						
LAN	>	WAN	2	Any	Smartchoice VOIP2	Any	Allow	All						
LAN	>	WAN	3	Any	Smartchoice VOIP3	Any	Allow	All						
LAN	>	WAN	4	Any	Smartchoice VOIP4	Any	Allow	All						
LAN	>	WAN	5	Any	Smartchoice VOIP5	Any	Allow	All						
LAN	>	WAN	6	Any	Smartchoice VOIP6	Any	Allow	All						
LAN	>	WAN	7	Any	Smartchoice VOIP7	Any	Allow	All						
LAN	>	WAN	9	Any	Smartchoice VOIP9	Any	Allow	All						
LAN	>	WAN	10	Any	Smartchoice VOIP10	Any	Allow	All						
WAN	>	LAN	11	Smartchoice VOIP1	Any	Any	Allow	All						
WAN	>	LAN	12	Smartchoice VOIP2	Any	Any	Allow	All						
WAN	>	LAN	13	Smartchoice VOIP3	Any	Any	Allow	All						
WAN	>	LAN	14	Smartchoice VOIP4	Any	Any	Allow	All						
WAN	>	LAN	15	Smartchoice VOIP5	Any	Any	Allow	All						
WAN	>	LAN	16	Smartchoice VOIP6	Any	Any	Allow	All						
WAN	>	LAN	17	Smartchoice VOIP7	Any	Any	Allow	All						
WAN	>	LAN	19	Smartchoice VOIP9	Any	Any	Allow	All						
WAN	>	LAN	20	Smartchoice VOIP10	Any	Any	Allow	All						

Inside each Access Rule, Change UDP Connection Inactivity Timeout to 120 seconds.

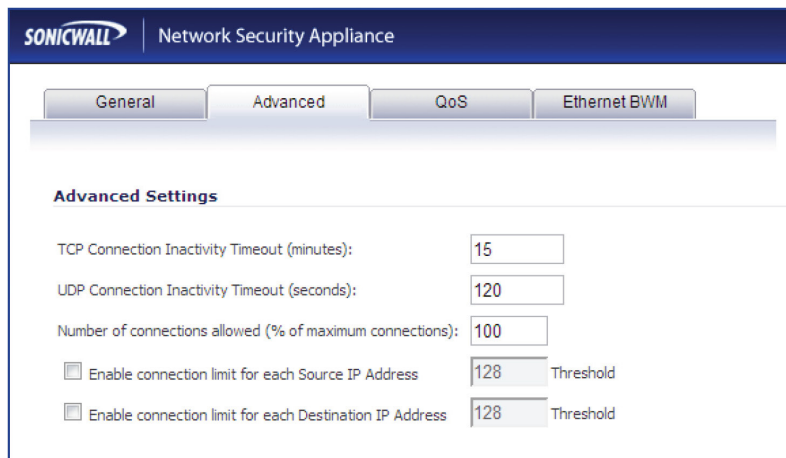

Inside each Access Rule, Change UDP Connection Inactivity Timeout to 120 seconds.

SONICWALL | Network Security Appliance

VoIP / **Settings**

Accept Cancel

General Settings

- Enable consistent NAT

SIP Settings

- Enable SIP Transformations
 - Permit non-SIP packets on signaling port
 - Enable SIP Back-to-Back User Agent (B2BUA) support
 - SIP Signaling inactivity time out (seconds):
 - SIP Media inactivity time out (seconds):
 - Additional SIP signaling port (UDP) for transformations (optional):

H.323 Settings

- Enable H.323 Transformations
 - Only accept incoming calls from Gatekeeper
 - Enable LDAP ILS Support
 - H.323 Signaling/Media inactivity time out (seconds):
 - Default WAN/DMZ Gatekeeper IP Address: